



Lubricants compatible with
elastomers and plastics



Lubricants compatible with elastomers and plastics

BECHEM – Lubrication solutions for industry

As the oldest German manufacturer of industrial lubricants, BECHEM is one of the leading producers of high-quality special lubricants and metalworking fluids today.

BECHEM products stand out through innovative formulations in the most diverse industrial applications – in machining and forming for metalworking processes, in coating technology and as for-life lubricants in various technical components.

A strong network of distributors and several national and international production sites ensure that BECHEM products are readily available worldwide.

Tomorrow's technologies. Today.

All indications and values correspond to latest knowledge and do not represent any product specification



Tension stress cracking caused by lubricants in contact with thermoplastics or thermosets

The application of lubricants in contact with plastic materials is of growing importance. An essential requirement is the compatibility between lubricant and polymeric material. In the BECHEM laboratories a large variety of test equipment is available to check the compatibility of these materials. BECHEM products for plastic lubrication excel in outstanding compatibility with plastic and have proven their suitability worldwide in many applications under severest conditions.



In case of internal and / or external tensions at formed parts of thermoplastic and thermosetting polymers tension cracks may occur when getting in contact with lubricants.

Caused by wetting, diffusion and lubricant properties the following physical process can take place in case of incompatibility with the lubricant: Potential microscopically small cavities or tension cracks will lead to breakages due to the wetting and swelling ability of the lubricant. The physical condition of the highly polymeric formed construction part (morphology, molecular mass, molecular mass distribution, branching, cross-linking, internal stress and orientation) determines this process.

Polycarbonate, polystyrene, polymethylmethacrylate, styrene-acrylonitrile-copolymer and polyvinyl chloride without plasticizers are especially susceptible to tension cracking. Tension stress cracking behaviour can be determined by using standardised test specimen or the corresponding construction part itself. Tension crack formation can be partly or fully prevented by selecting the suitable lubricant.

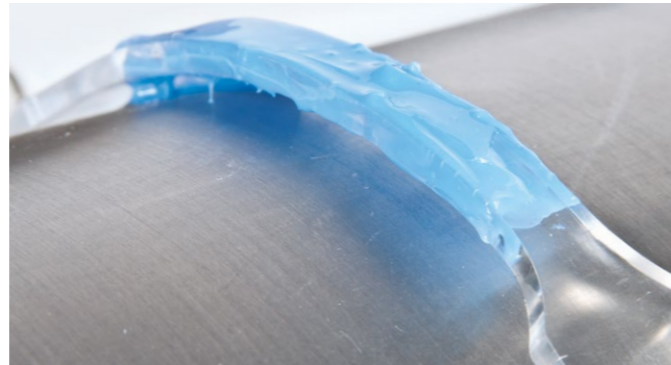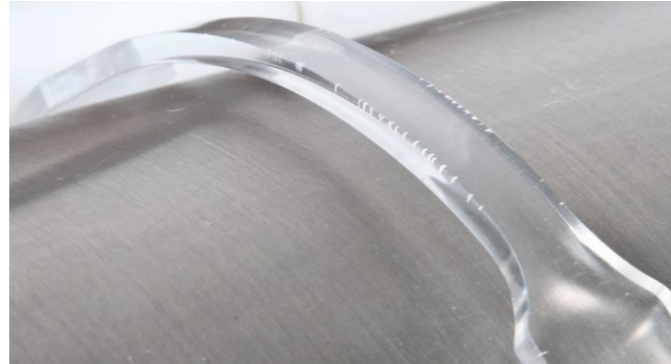

Test specimen in bent strip test acc. to EN ISO 22088-3 without and with lubricant

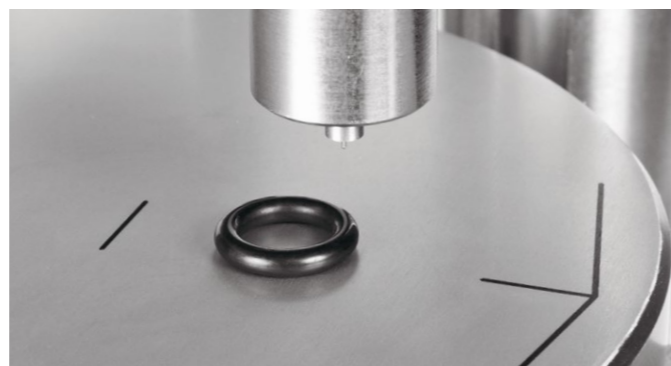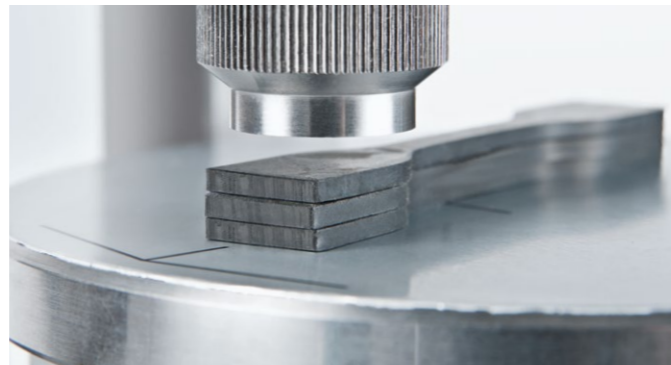

Tensile strength test (upper picture) and hardness tests of elastomers

Swelling or shrinking of elastomer sealing materials (elastomers) in contact with lubricants

Physical Interaction


Physical interaction comprises two simultaneous processes:

- A: Absorption of the lubricating medium by the sealing material**
- B: Extraction of the soluble parts – especially plasticizers – from the sealing material**

The result is always a change in volume, i.e. swelling when A exceeds B or shrinking when B exceeds A. Each change in volume – whether swelling or shrinking – causes changes in the mechanical properties of the sealing material. This relates to hardness, elasticity, tensile strength and break elongation. Depending on the extent, these changes may lead to a complete destruction of the sealing material.

Chemical Interaction

In case of chemical interaction the parts of the lubricating medium react with the sealing material which will change its structure, e.g. cross-linking or degradation. Slight chemical changes of the sealing material can lead to serious changes in the physical properties (embrittlement). The compatibility of elastomers with lubricants is examined according to defined test methods. In most cases changes in volume and hardness as well as tensile strength after a certain time of exposure under well defined conditions are analysed to determine compatibility.

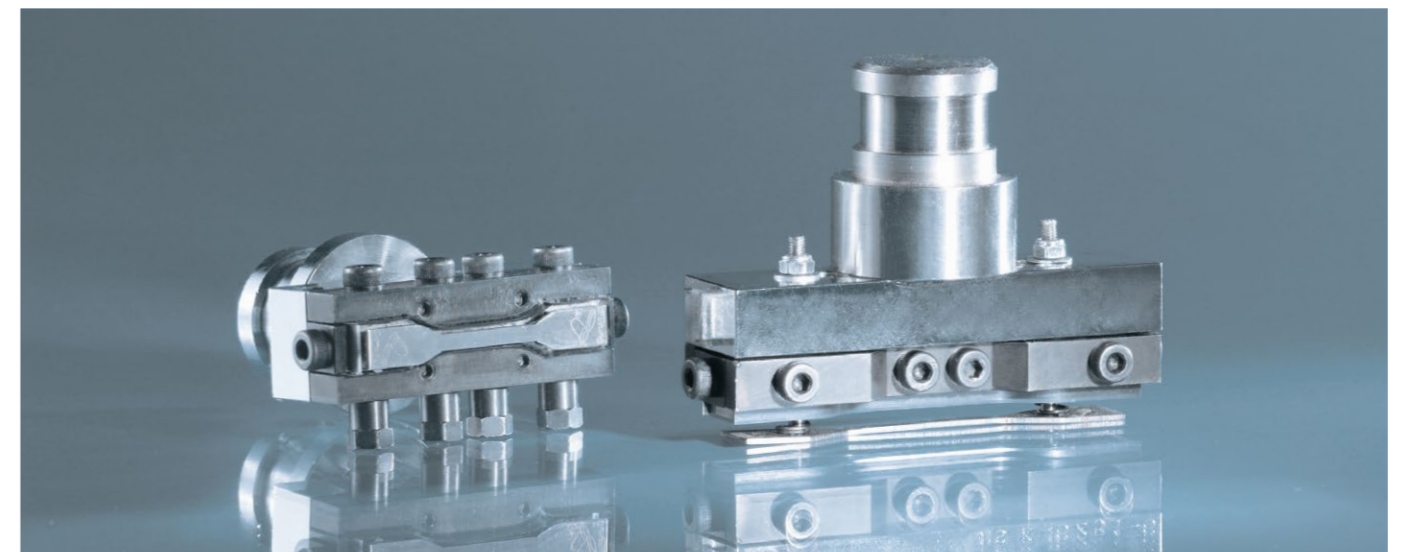

Elastomer and plastic compatibility of different lubricants



Lubricating grease group A	Lubricating grease group B	Lubricating grease group C	Lubricating grease group D	Lubricating grease group E	Lubricating grease group F
Mineral oils with metal soaps, polyurea or inorganic thickeners e.g.:	Diester oils, polyglycols, polybutenes with metal soaps or inorganic thickeners e.g.:	Special ester oils with polyurea or inorganic thickeners e.g.:	Synthetic hydrocarbons with metal soaps, polyurea or inorganic thickeners e.g.:	Silicone oils with PTFE (polytetrafluoroethylene), metal soaps or inorganic thickeners e.g.:	PFPE (perfluoropolyether oils) with PTFE (polytetrafluoroethylene) e.g.:
Berulub FA 46 Berutox M 21 HT BECHEM High-Lub LT 2 EP BECHEM High-Lub SW 2	Berulub FK 35 B Berulub Hydrohaf 2 Berulub KR-EL 2 Berulub KR-EP 2 Beruplex LG 21 F	Berulub FK 64 Berulub FK 97 E Berulub FK 122 Berulub PAL 1	Berulub FB 34 Berulub FH 57 Berulub FR 16 Berulub FR 43 Berusoft 10 Berusoft 15 Berusoft 30 Berutox FH 28 KN BECHEM Ceritol PK 1 BECHEM Ceritol PK 1 Soft	Berulub FO 34 Berulub OX 40 EP Berulub Sihaf 2 Berusil FO 25 Berusil FO 26 Berusil FO 36-2 Berusil FO 63	Beruglide L Berutemp 500 T 2 Berutox VPT 54-2 Berutox VPT 64-2 Berulub FK 164-2 UV

Lubricating greases and their behaviour towards sealing materials (elastomers)

Abbreviation	Elastomers	Lubricating grease group A	Lubricating grease group B	Lubricating grease group C	Lubricating grease group D	Lubricating grease group E	Lubricating grease group F
ACM	Acrylate rubber	●	○	●	●	●	●
CR	Chloroprene rubber	●	○	●	●	●	●
EPDM	Ethylene-propylene-diene rubber	○	●	○	●	●	●
FKM/FPM	Fluorinated rubber	●	●	●	●	●	●
FEPM	Propylene-tetrafluoroethylene rubber	●	●	●	●	●	●
HNBR	Hydrogenated nitrile-butadiene rubber	●	○	●	●	●	●
NBR	Nitrile-butadiene rubber	●	●	●	●	●	●
SBR	Styrene-butadiene rubber	●	○	●	●	●	●

Lubricating greases and their behaviour towards plastic materials (thermoplastics/thermosets)

Abbreviation	Plastics (thermoplastics/thermosets)	Lubricating grease group A	Lubricating grease group B	Lubricating grease group C	Lubricating grease group D	Lubricating grease group E	Lubricating grease group F
ABS	Acrylonitrile-butadiene-styrene	●	●	●	●	●	●
PA	Polyamide (polycaprolactam)	●	●	●	●	●	●
PC	Polycarbonate	●	○	●	●	●	●
PC/ABS	Polycarbonate/acrylonitrile-butadiene-styrene	●	○	●	●	●	●
PE	Polyethylene	●	●	●	●	●	●
PET/PBT	Polyethylene-/polybutylene terephthalate	●	●	●	●	●	●
POM	Polyoxymethylene, polyacetal	●	●	●	●	●	●
PP	Polypropylene	●	●	●	●	●	●
PTFE	Polytetrafluoroethylene	●	●	●	●	●	●
PU	Polyurethane	●	●	●	●	●	●
PVC	Polyvinyl chloride	●	●	●	●	●	●
TPE	Thermoplastic elastomer (polyether/polyester)	●	●	●	●	●	●

The mentioned compatibilities are based on laboratory tests and references. In view of the variety of used raw materials as well as the complex chemical and morphological structure of the polymers the given information represent general tendencies only. In individual cases and especially prior to serial production the compatibilities should be confirmed by the supplier or verified in laboratory tests.

● resistant ● partly resistant ○ not resistant

Lubrication solutions for industry



CARL BECHEM GMBH

Weststr. 120 · 58089 Hagen · Germany · Phone +49 2331 935-0 · Fax +49 2331 935-1199 · bechem@bechem.de · www.bechem.com